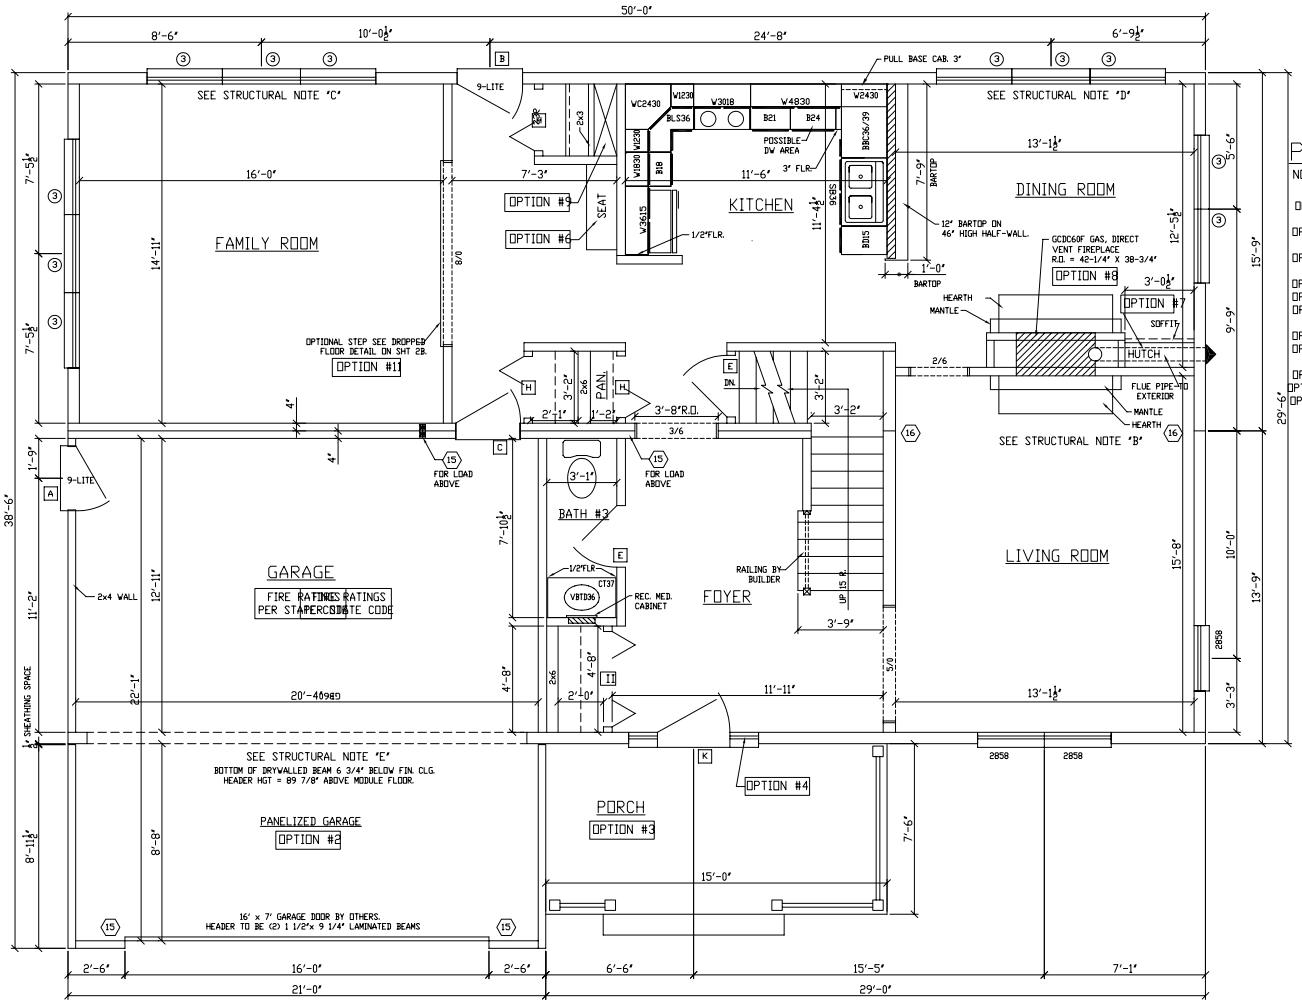


PLAN OPTION LEGEND:

NOTE: OPTIONS SHOWN ON PLAN AS DESCRIBED BELOW ARE NOT INCLUDED IN THE BASE PRICE.

OPTION #1= OPTIONAL WASHER AND ELECTRIC DRYER HOOK-UP. SHELF INCLUDED WITH OR WITHOUT WASHER/DRYER HOOK-UP.
OPTION #2= OPTIONAL PANELIZED GARAGE. WALLS TO BE BUILT AS PANELS, ROOF TRUSSES AND MATERIALS SHIPPED LOOSE. SADDLE MATERIALS SHIPPED LOOSE WHEN GARAGE ROOF JOINS MODULAR ROOF.
OPTION #3= OPTIONAL PORCH ROOF MATERIALS SHIPPED LOOSE. PORCH FLOOR, COLUMNS AND RAILING BY OTHERS.
OPTION #4= OPTIONAL 5-LITE SIDELIGHTS - CS308W PER SIDE. STANDARD DOES NOT INCLUDE SIDELITES.
OPTION #5= OPTIONAL "VENUS I" WHIRLPOOL # 46042ILX SHOWN. "VENUS I" SOAKING TUB # 46042OLX S
OPTION #6= OPTIONAL BUILT-IN SEAT - 16" DEEP, 1 1/2" THICK LAMINATED SEAT @ 19" A.F.F.. BTM OF SEAT CLOSED-OFF WITH PLYWOOD TO MATCH CABINETS.
OPTION #7= OPTIONAL BUILT-IN HUTCH BY MANUFACTURER - SEE DETAIL.
OPTION #8= OPTIONAL 4-IN-1 FIREPLACE, MANTEL & HEARTH. FIREPLACE VENTED TO EXTERIOR THROUGH SOFFIT OVER HUTCH.
OPTION #9= OPTIONAL FLUE CHASE. WHEN CHASE IS NOT CHOSEN, THE CLOSETS SHALL BE MADE DEEPER.
OPTION #10 = OPTIONAL POCKET DOOR. STANDARD IS A 2/6 SWING DOOR.
OPTION #11= OPTIONAL DROPPED FLOOR - SEE SECTION DETAIL.

STRUCTURAL NOTES:

A) (1) 1 1/2"x 11 1/4" LAM. CEILING GIRDER PER MODULE.
B) (1) 1 1/2"x 16" LAM. CEILING GIRDER PER MODULE. NOTE, FLOOR RIM OF UPPER MODULE TO BE NOTCHED TO ALLOW 16" DEPTH OF BEAM TO BEAR ON THE 2x6 WALL ADJACENT TO THE STAIRS.
C) (3) 1 1/2"x 9 1/4" LAM. BEAM HEADER.
D) (3) 2x10 SYP#2 HEADER.
E) (3) 1 1/2"x 18" LAM. CEILING GIRDER TO BE MOUNTED FLUSH TOP OF BEAM WITH TOP OF 2x12 CEILING JOIST PERIMETER.

STUD COLUMN LEGEND:

⟨15⟩ = (2) 2x4 STUD GRADE COLUMNS EACH MODULE
⟨16⟩ = (2) 2x6 STUD GRADE COLUMNS EACH MODULE
⟨18⟩ = (3) 2x4 STUD GRADE COLUMNS EACH MODULE
⟨19⟩ = (3) 2x6 STUD GRADE COLUMNS EACH MODULE

OPTIONS SHOWN ON PLANS AND ELEVATIONS ARE NOT IN THE "BASE PRICE". OPTIONS TO BE SPECIFIED ON THE ACTUAL SALES ORDER FORM.

This Drawing is for REFERENCE ONLY and may be used in conjunction with STRUCTURAL DRAWINGS AND DETAILS. These prints are drawn as APPROXIMATE REPRESENTATIONS. Actual dimensions and overall appearance may differ due to construction techniques and conflicts that are beyond the control of AVIS AMERICA.

In Signing I Acknowledge I Have Received and Accept this print

REVISIONS
1.
2.
3.
4.
5.
6.
7.


Excel Homes
Building Excellence


2324 SQ FT.
7295EL HILLSDALE (TWO STORY)
1ST FLOOR

DRAWN BY: JPJ | CHECKED BY: --- | DATE: 6/20/02 | SCALE: 3/16"=1'-0"

SN- /PD-?/ STATE
BLDR/ CUST.


SHEET #:

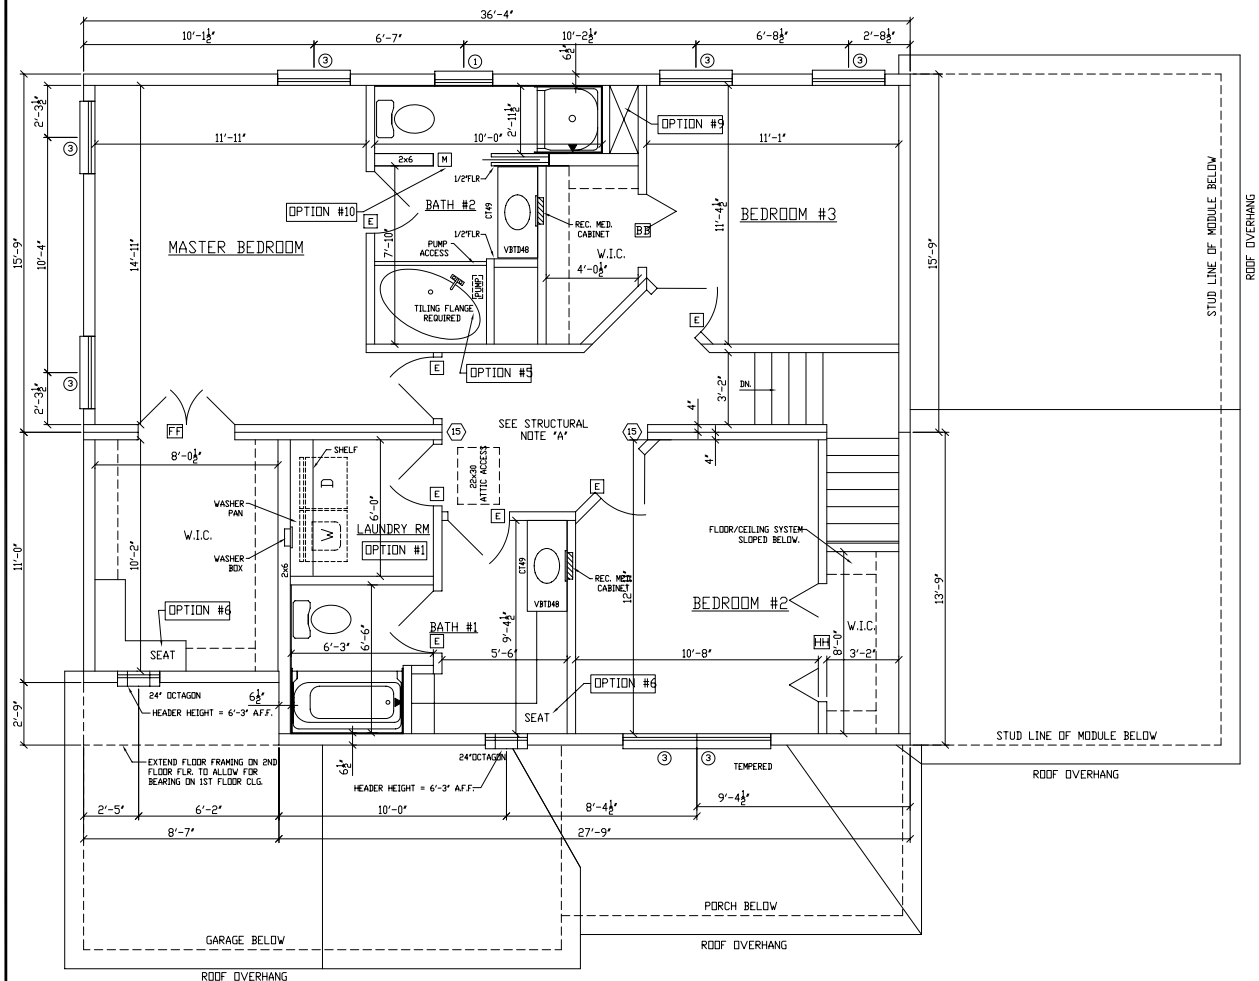

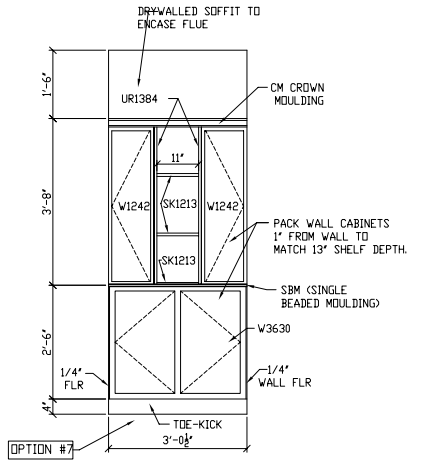

DINING ROOM HUTCH DETAIL

SCALE: 3/8" = 1'-0"

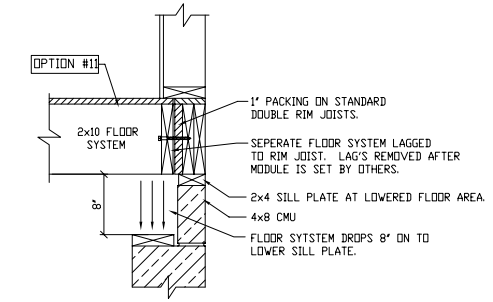

DROPPED FLOOR DETAIL

SCALE: 3/8" = 1'-0"

OPTIONS SHOWN ON PLANS AND ELEVATIONS ARE NOT IN THE 'BASE PRICE'. OPTIONS TO BE SPECIFIED ON THE ACTUAL SALES ORDER FORM.

This Drawing is for REFERENCE ONLY and may be used in conjunction with STRUCTURAL DRAWINGS AND DETAILS. These prints are drawn as APPROXIMATE REPRESENTATIONS. Actual dimensions and overall appearance may differ due to construction techniques and conflicts that are beyond the control of AVIS AMERICA.

In Signing I Acknowledge I Have Received and Accept this print

REVISIONS
1.
2.
3.
4.
5.
6.
7.

Excel Homes
Building Excellence

2824 SQ FT
729SEL HILLSDALE (TWO STORY)
2ND FLOOR

DRAWN BY: JPJ | CHECKED BY: --- | DATE: 6/20/02 | SCALE: 3/16"=1'-0"

SN- /PD-?/ STATE

BLDR/ CUST.

SHEET #: